General Specifications for HUH2-16" Fan Size Hydronic Unit Heater

Notes 1. Pressure/Temperature Ratings

Pressure = 400 psig (2758 kPa) Temperature = 550°F (288°C) MDMT = - 20° F (-29° C)

2. Materials

Cabinet: 14 Ga, Yellow Epoxy/Polyester Powder Coated Core: Carbon Steel with Copper-free Aluminum Fins Louvers: Anodized Extruded Aluminum

3. Fluid Connections

2 in, FNPT

Optional Thread-on 2 in. MNPT (shipped loose) Optional 2 in. FNPT CL300# flange (shipped loose)

4. Mounting

5/8 in. - 11 UNC diameter holes on top (4 places)

5. Fan

Spark-proof three-blade aluminum


6. Fan Guard

Split design with close wire spacing. A 3/8 in. (9.5 mm) diameter probe will not enter

7. Ex-Proof Motors


Class I, Divisions 1 & 2, Groups C & D Class II, Divisions 1 & 2, Groups F & G Temperature Code T3B

- ♦ Thread-on fittings. Shipped loose and must be installed on site. C3 connection also includes C2 connection.
- † Standard Marathon NEMA ex-proof motor is suitable for Class I & II, Div. 1 & 2, Groups C, D, F & G; T3B. Ensure equipment meets the requirements of your hazardous location.
- * Other voltages/frequencies available upon request. Longer lead times may apply. Contact factory.
- ▶ NEMA motors are designed to be operated at rated voltage with tolerances of ± 10%. If the motor is marked 208-230V the tolerance must be calculated from 230V. If motor is marked 230V it is still suitable for 208V operation but the tolerance must be calculated from 230V. For 3-phase motors the line-to-line full load voltage must be balanced within 1%.

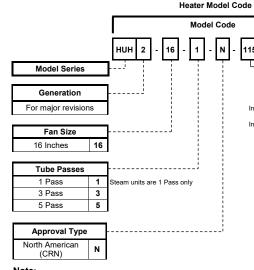

Note:

The fan shroud is made of spark resistant aluminum compliant to AMCA 99-10, Type B

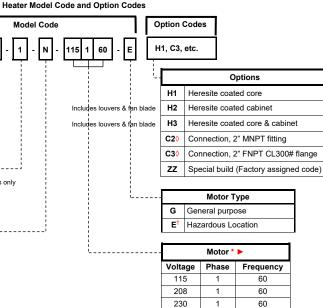

208

230


460

575

3

3

3

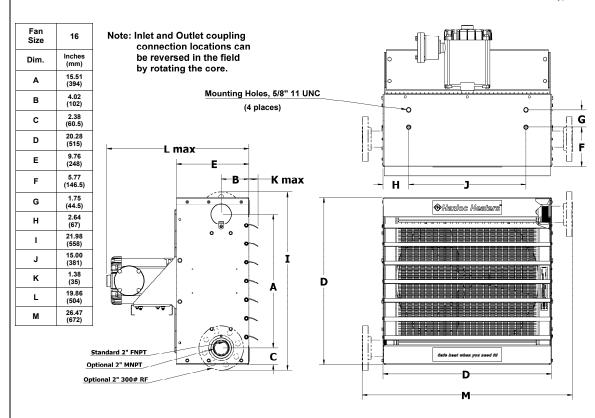

Special Requirements/Notes:	

60

60

60

60