General Specifications for HUH2-24" Fan Size Hydronic Unit Heater

Notes 1. Pressure/Temperature Ratings

Pressure = 400 psig (2758 kPa) Temperature = 550°F (288°C) MDMT = - 20° F (-29° C)

2. Materials

Cabinet: 14 Ga, Yellow Epoxy/Polyester Powder Coated Core: Carbon Steel with Copper-free Aluminum Fins Louvers: Anodized Extruded Aluminum

3. Fluid Connections

2 in, FNPT

Optional Thread-on 2 in. MNPT (shipped loose) Optional 2 in. FNPT CL300# flange (shipped loose)

4. Mounting

5/8 in. - 11 UNC diameter holes on top (4 places)

5. Fan

Spark-proof three-blade aluminum


6. Fan Guard

Split design with close wire spacing. A 3/8 in. (9.5 mm) diameter probe will not enter

7. Ex-Proof Motors

Class I, Divisions 1 & 2, Groups C & D Class II, Divisions 1 & 2, Groups F & G Temperature Code T3B

- ♦ Thread-on fittings. Shipped loose and must be installed on site. C3 connection also includes C2 connection.
- † Standard Marathon NEMA ex-proof motor is suitable for Class I & II, Div. 1 & 2, Groups C, D, F & G; T3B. Ensure equipment meets the requirements of your hazardous location.
- * Other voltages/frequencies available upon request. Longer lead times may apply. Contact factory.
- ▶ NEMA motors are designed to be operated at rated voltage with tolerances of ± 10%. If the motor is marked 208-230V the tolerance must be calculated from 230V. If motor is marked 230V it is still suitable for 208V operation but the tolerance must be calculated from 230V. For 3-phase motors the line-to-line full load voltage must be balanced within 1%.

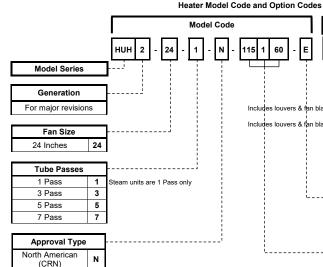

 Motor Type				
G	General purpose			
Ε [†]	Hazardous Location			

Options

Heresite coated core & cabinet

ZZ Special build (Factory assigned code)

Connection, 2" FNPT CL300# flange

Connection, 2" MNPT fitting

Heresite coated core

Heresite coated cabinet

Option Codes

H1, C3, etc.

H1

H2

НЗ

C3◊

Includes louvers & fan blade


Includes louvers & fan blade

Special Requirements/Notes:

Note:

The fan shroud is made of spark resistant aluminum compliant to AMCA 99-10, Type B

 Motor * ►						
Voltage	Phase	Frequency				
115	1	60				
208	1	60				
230	1	60				
208	3	60				
230	3	60				
460	3	60				
575	3	60				

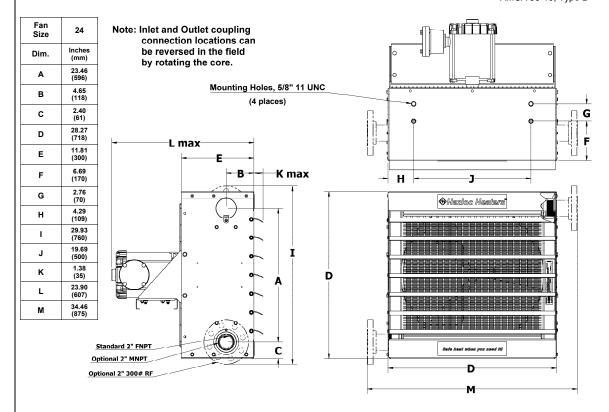

Approval Drawing	HUH2-24" Fan Size Heater		
June 7, 2021	Version 1.1		
Hazloc Heaters Inc.	Calgary, Alberta		



© Copyright 2021

CRN: 0H14933.2C - steam or fluids (not for use with lethal fluids as defined by ASME, Section VIII, Div. 1, UW-2)